

XSYS

Print solid. Stay flexible.

nyloprint[®] **WAS**

**Water washable coating plate
for security printing**



Be
brilliant.

HIGHEST PRINT QUALITY

- Excellent solid density due to brilliant ink transfer of the soft relief layer.
- High register accuracy due to the dimensional stability of the aluminium base.
- Very good durability for long print runs.
- Reliably reusable for repeat orders.

FOR SOLID AND SPOT COATING

- Water-washable - ideal for inhouse plate processing, e.g. on nyloprint® Flowline Washer.
- Designed for high quality demands in coating with UV-varnish.
- Inline and offline print finishing.
- For solid and spot coating.

EFFICIENT, CONSISTENT AND FAST PLATE PROCESSING

- Highly productive and cost effective due to plate processing within 25-35 min.
- Reduced down times on press due to fast replacement of plates.
- Wide exposure latitude combined with open reverses.



Be
brilliant.

nyloprint®
WAS

ADVANTAGES OF nyloprint® DIGITAL

Higher print quality

- Reproduction of finer details and less dot gain due to digital imaging.
- High dimensional stability.
- No defects caused by dust and damaged films.
- No data loss during transfer.
- Smoother plate surface can achieve higher density.
- Highly consistency especially with repeated plate processing.


Cost effective and environmentally friendly

- No film costs.
- No chemicals for film development.
- Electronic filing of graphics, film storage is redundant.
- Easy and fast data exchange - worldwide.

FOR SECURITY PRINTING- A MATTER OF TRUST

nyloprint® WA S Digital

Water washable coating plate for security printing (inhouse plate processing)

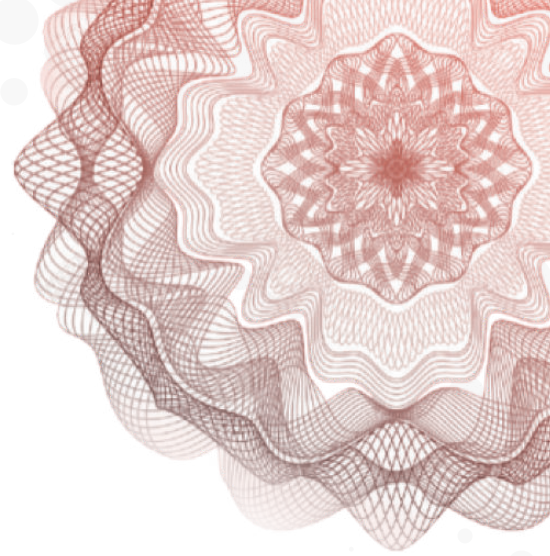

Technical characteristics ¹	nyloprint® WA 116 S ¹	nyloprint® WA 116 S Digital
	116	116
Ease material	aluminium	
Colour of raw plate	red	
Total thickness (mm inch)	1.16 0.046"	1.16 0.046"
Plate hardness (Shore D Microshore D)	38	38
Relief depth (mm inch)	0.85 0.033"	0.85 0.033"
Tonal range (%) at 60 L/cm (150 lpi)	3 - 90	3 - 90
Fine line width (down to µm)	100	100
Isolated dot diameter (down to µm)	400	400
Distortion factor (mm inch)	5.4 0.212"	5.4 0.212"
Processing parameters²		
Exposure (min)	3 - 4	
Washout speed Flowline Washer (mm/min)	160 - 180 (post exposure switched off)	
Drying time at 80°C / 176°F (min)	10	
Post exposure (min)	2	

Processing Equipment

Suitable equipment	nyloprint® WA 116 S Digital plates can be processed with nyloprint® processing equipment and all similar devices and can be used with all laser systems suitable for imaging letterpress plates
Printing inks and varnishes	Suitable for UV and oil based inks and varnishes. Not suitable for water based inks and varnishes.
Washout medium	For washout only tap water is needed.
Processing information	A detailed description of the individual platemaking steps, as well as detailed information about processing and storing can be found in the nyloprint® User Guide.
Certification	XSYS printing plates are produced at Willstätt production site, which is certified according to international standards for quality management (DIN EN ISO 9001:2015), environmental management (DIN EN ISO14001:2015) and energy management (DIN EN ISO 50001:2018).

1) non-standard product 2) All processing parameters depend on, among others, the processing equipment and lamp age. The above mentioned processing parameters were established under optimum conditions on nyloprint® processing equipment. Under other conditions the processing times can differ from these. Therefore the above mentioned values are only to be used as a guide.

Please contact us for additional information.
info@xsysglobal.com • www.xsysglobal.com

Our technical documents are designed to inform and guide our customers. The information provided herein is accurate to the best of XSYS's knowledge; however, we accept no liability for any errors, inaccuracies, or opinions expressed. Customers are responsible for determining the suitability of this product for their specific application. XSYS assumes no responsibility for any loss incurred as a result of reliance on the information contained in this document. Product names followed by ® are registered trademarks of XSYS Germany GmbH and/or its affiliates.

XSYS 02-2025
Print solid. Stay flexible.

XSYS

Print solid. Stay flexible.