


XSYS

Print solid. Stay flexible.

nyloflex[®] **Exposure F IV ECLF**

**Combined exposure and light finisher
unit with reduced footprint and
efficient design**

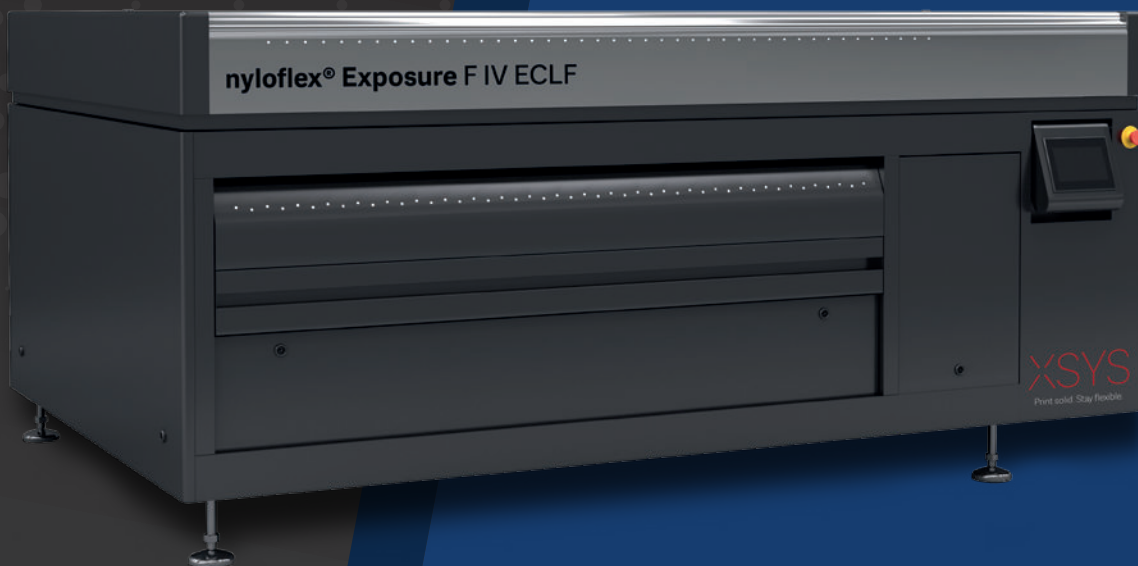

Be
brilliant.

EXPOSURE SECTION

- **Integrated bed chiller allows** for uniform and consistent temperature without limiting exposure times.
- **High concentration of UV-A lamps** to ensure the highest UV output.
- **Fibre optic** to detect defective lamps.
- **Air flow cooling system** for exposure lamps with temperature control.
- **Stores up to 24** different process conditions.



LIGHT FINISHING SECTION

- **One-drawer UV-A / UV-C** post exposure and light finishing system.
- **Includes Air flow** cooling system.



nyloflex[®] Exposure F IV ECLF

For plate sizes up to 1200 mm x 1600 mm (47" x 63")

Be
brilliant.

nyloflex[®]

Exposure



F IV ECLF

Combined exposure and light finisher unit with reduced footprint and efficient design



Technical data	nyloflex [®] Exposure F IV ECLF	Art. XG50-0004-V103
Maximum plate size (W x L)	1200 mm x 1600 mm (47" x 63")	
Electrical connection	400 V, 50/60 Hz (3 Ph/N/PE) 230 V, 50/60 Hz (3 Ph/PE)	
Nominal current	at 400 V: 15A at 230 V: 25A	
Nominal power	9.5 kW	
Compressed air	Min. 102 PSI (7 bar)	
Exhaust air flow rate	Min. 590 CFM (1000 m ³ /h)	
Exhaust air	Ø 6" (152.4 mm), min. 600 SCFM (1019 m ³ /h)	
Weight	gross: 1400 kg (3090 lbs) net: 1120 kg (2472 lbs)	
Crate dimensions (W x D x H)	2930 mm x 1930 mm x 1590 mm (116" x 76" x 63")	
Recommended ambient temp.	20 - 25 °C (68 - 77 °F)	

Equipment Dimensions

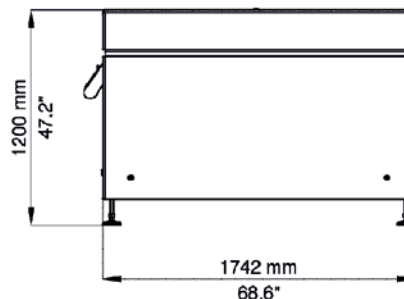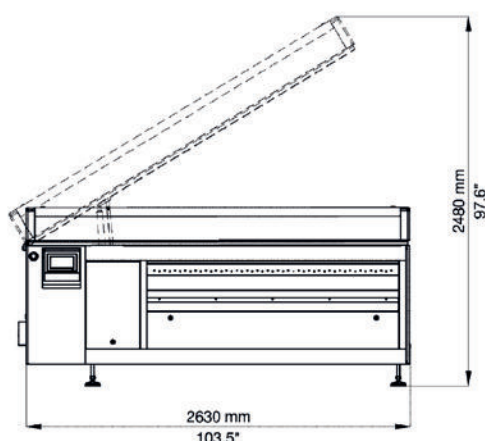

Please contact us for additional information.

info@xsyglobal.com • www.xsyglobal.com

Our technical documents are designed to inform and guide our customers. The information provided herein is accurate to the best of XSYS's knowledge; however, we accept no liability for any errors, inaccuracies, or opinions expressed. Customers are responsible for determining the suitability of this product for their specific application. XSYS assumes no responsibility for any loss incurred as a result of reliance on the information contained in this document. Product names followed by [®] are registered trademarks of XSYS Germany GmbH and/or its affiliates.

XSYS 02-2025

Print solid. Stay flexible.

XSYS

Print solid. Stay flexible.