

XSYS

Print solid. Stay flexible.

nyloprint® **Combi CW 50x70**

**Compact all-in-one letterpress
plate making system with
exposure, washout and drying
functions**



Be
brilliant.



HIGH EFFICIENT AND COST EFFECTIVE

- **Exposure**, washout and drying unit for the production of high quality water washable letterpress plates.
- **Space saving as** all units can neatly be stacked on a trolley base.
- **Available and useable** as separate components with own electrical connection – allows to easily replace or upgrade one part of the system if necessary.
- **Long service life due** to advanced materials – all parts in contact with water are made of high quality stainless steel.
- **Process safety due** to programmed plate processing parameters and temperature controlled washout section.
- **For washout only tap** water is needed.
- **Less mechanical stress due** to a proven plush washout system that prevents the washing away of fine elements.
- **Oscillating plate holder** ensures even plate washout and is self adjusting to allow the use of different plate thicknesses.

SIMPLE OPERATING AND CONVENIENT HANDLING

- **Digital programmable operating panels** for customising the processing times of each function.
- **Audio alarm** to signal end of each process.
- **Trolley base with casters** for easy movement and access to the system.

Be
brilliant.

nyloprint® Combi CW 50x70

Suitable for processing
water washable printing
plates up to a maximum
size of 500 mm x 700 mm
(19.7" x 27.6")


COMPACT ALL-IN-ONE LETTERPRESS PLATE MAKING SYSTEM

nyloprint®

Combi CW 50x70

Compact all-in-one letterpress plate making system with exposure, washout and drying functions

Technical data	Exposure Art. XG10-0004-0114	Washer Art. XG10-0006-0116	Dryer Art. XG10-0005-0114	Trolley Art. XG10-0029-0112
Maximum plate size (W x L)	500 mm x 700 mm (19.7" x 27.6")			
Electrical connection	230 V, 50 Hz (1 Ph/N/PE) 230 V, 60 Hz (1 Ph/N/PE)	230 V, 50/60 Hz (1 Ph/N/PE)	230 V, 50/60 Hz (1 Ph/N/PE)	230 V / 400 V (AC)
Nominal current	2.2 A / 2.8 A	13.6 A	4.2 A	-
Nominal power	1.0 kW	3.2 kW	1.2 kW	5.4 kW
Tube type UV-A	40 W, TL 10R	-	-	-
Fresh water connection	-	R ½"	-	-
Waste water connection	-	Ø 25 mm (0.984")	-	-
Dryer	-	-	2 x 500 W	-
Weight (approx.)	90 kg (198 lbs) net 142 kg (313 lbs) gross	85 kg (187 lbs) net 137 kg (302 lbs) gross	75 kg (165 lbs) net 127 kg (280 lbs) gross	38 kg (84 lbs) net 56 kg (123 lbs) gross
Crate dimensions (W x D x H)	1172 x 1072 x 518 mm (46.1 x 42.2 x 20.4")	1172 x 1072 x 518 mm (46.1 x 42.2 x 20.4")	1172 x 1072 x 518 mm (46.1 x 42.2 x 20.4")	982 x 860 x 495 mm (38.7" x 33.9" x 19.5")

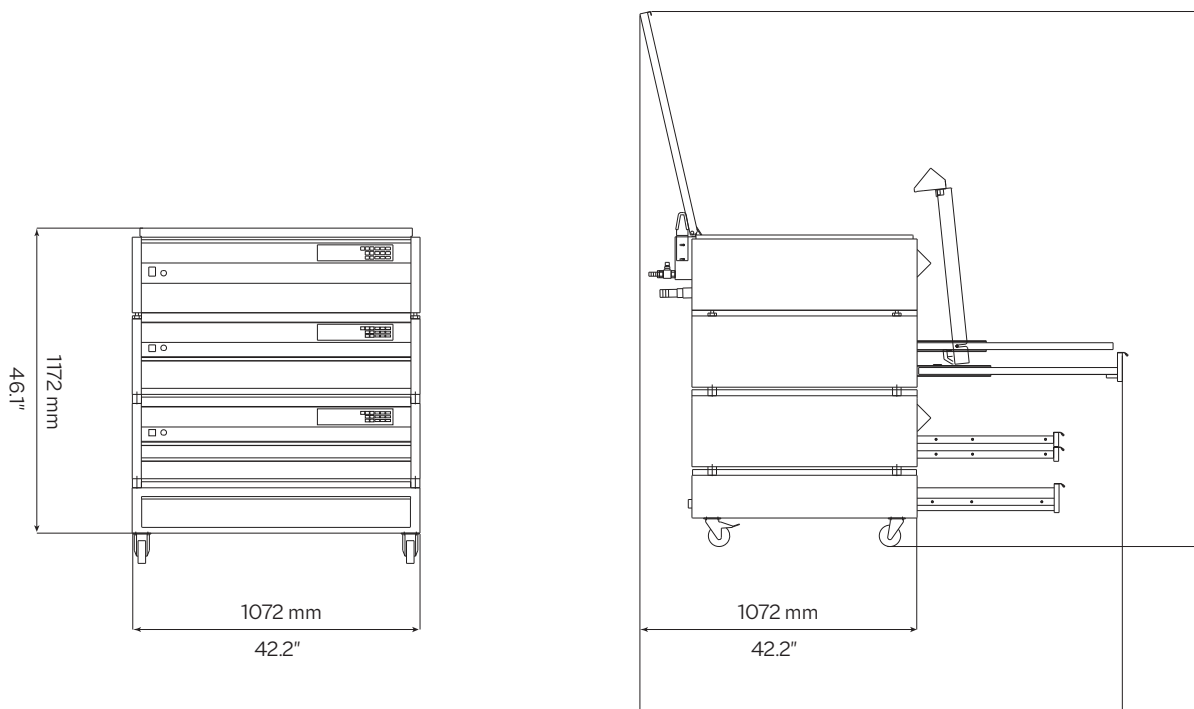

Please contact us for additional information.
info@xsysglobal.com • www.xsysglobal.com

Our technical documents are designed to inform and guide our customers. The information provided herein is accurate to the best of XSYS's knowledge; however, we accept no liability for any errors, inaccuracies, or opinions expressed. Customers are responsible for determining the suitability of this product for their specific application. XSYS assumes no responsibility for any loss incurred as a result of reliance on the information contained in this document. Product names followed by ® are registered trademarks of XSYS Germany GmbH and/or its affiliates.

XSYS 02-2025
 Print solid. Stay flexible.



XSYS

Print solid. Stay flexible.