

XSYS

Print solid. Stay flexible.

nyloflex[®] eco ACT

The sustainable plate for
paper & board applications




Be
brilliant.

SUSTAINABILITY

- Contains 24 - 29% renewable raw material.¹
- Proven, consistent quality in a more sustainable way.
- Improved productivity on LED exposure units.
- Energy saving due to 20% faster plate processing.²
- Consistent and reliable plate processing (waste reduction).



IMPROVED PRODUCTIVITY

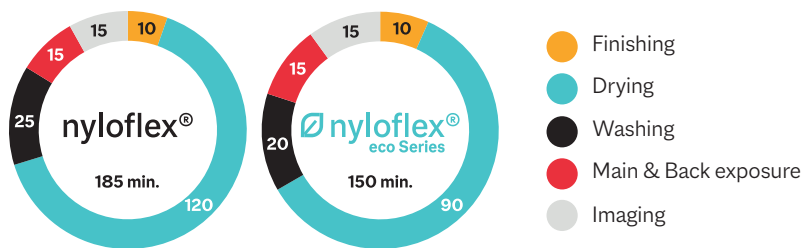

- Overall **20% faster** plate processing possible when using **nyloflex® eco plates** (in direct comparison to standard nyloflex® ACT).²



SEGMENTATION

- Pre-print
- Bags & Sacks
- Folding Carton
- GD2
- Paper wrappers
- Gift wrappers



nyloflex® eco ACT

- Sustainable medium hard photopolymer flexo plate for the perfect combination of halftones & solids.
- Suitable for tube & LED exposure.
- Dedicated for paper & board applications with water based inks.



LET YOUR BRAND
SHINE
WITH PROVEN, CONSISTENT
QUALITY
IN A MORE
SUSTAINABLE WAY

Be
brilliant.



nyloflex® eco ACT

The sustainable plate for paper & board applications



Technical characteristics	The nyloflex® eco ACT				The nyloflex® eco ACT Digital			
	114	170	254	284	114	170	254	284
Base material	Polyester film				Polyester film			
Colour of raw plate	Light blue				Light blue with black LAMS layer			
Total thickness (mm inch)	1.14 0.045	1.70 0.067	2.54 0.100	2.84 0.112	1.14 0.045	1.70 0.067	2.54 0.100	2.84 0.112
Finished plate hardness (Shore A)	72	61	54	52	72	61	54	52
Relief depth (mm inch)	0.6 - 0.7	0.7 - 0.9	0.9 - 1.2	0.9 - 1.2	0.5 - 0.7	0.7 - 0.9	0.9 - 1.2	0.9 - 1.2
Fine line width (µm)	60	60	80	80	60	60	80	80
Isolated dot diameter (µm)	100	160	200	200	100	160	200	200
Processing parameters³								
Back exposure (s)	15 - 30	25 - 50	25 - 50	25 - 50	15 - 30	25 - 50	25 - 50	25 - 50
Main exposure (min)	8 - 12	8 - 12	8 - 15	8 - 15	8 - 12	8 - 12	12 - 15	12 - 15
Washout speed (mm/min)	230 - 280	200 - 250	180 - 230	160 - 210	230 - 280	200 - 250	180 - 230	160 - 210
Drying time at 60 °C 140 °F (h)	1.5 - 2.0	1.5 - 2.0	2.0 - 3.0	2.0 - 3.0	1.5 - 2.0	1.5 - 2.0	2.0 - 3.0	2.0 - 3.0
Post exposure (UV-A) (min)	8	8	8	8	8	8	8	8
Light finishing (UV-C) (min)	6 - 8	6 - 8	6 - 8	6 - 8	6 - 8	6 - 8	6 - 8	6 - 8
Laser intensity (J/cm ²)	N.A				3.4 J/cm ² (depending on Laser manufacturer and model)			

Processing information

Suitable equipment

The nyloflex® eco ACT can be processed with nyloflex® processing equipment and all similar devices. The nyloflex® eco ACT Digital can be used with all laser systems suitable for imaging flexo printing plates.

Printing inks

Optimized for paper and board applications using water-based inks; not suitable for solvent-based or UV inks.

Washout solvents

Especially good results are achieved with nylosolv® / SOLVIT® washout solvents. nylosolv® / SOLVIT® can be distilled and reused.

Processing information

A detailed description of the imaging, exposure and finishing steps, as well as detailed information about handling and storing, can be found in the nyloflex® User Guide.

Certification

XSYS printing plates are produced at Willstätt production site, which is certified according to international standards for quality management (DIN EN ISO 9001:2015), environmental management (DIN EN ISO 14001:2015) and energy management (DIN EN ISO 50001:2018).

1) Plate thickness dependent / Analysis report available on request 2) Depending on current plate setup, used washout solvent & equipment 3) All processing parameters depend on, among other things, the processing equipment, lamp age and the type of washout solvent. A minimum exposure intensity of $\geq 17 \text{ mW/cm}^2$ is recommended. The above mentioned processing times were established under optimum conditions in our technical center. The standard test file with 149lpi was imaged at 400DPI using a ThermoFlexX imager, 20 mW/cm² bank exposure, using nylosolv® A washout solvent and nyloflex® and ThermoFlexX Catena plate processing equipment. Under other conditions the processing times can differ from these; therefore, the above mentioned values are only to be used as a guide.

Please contact us for additional information.

info@xsyglobal.com • www.xsyglobal.com

Our technical documents are designed to inform and guide our customers. The information provided herein is accurate to the best of XSYS's knowledge; however, we accept no liability for any errors, inaccuracies, or opinions expressed. Customers are responsible for determining the suitability of this product for their specific application. XSYS assumes no responsibility for any loss incurred as a result of reliance on the information contained in this document. Product names followed by ® are registered trademarks of XSYS Germany GmbH and/or its affiliates.

XSYS 05-2026

Print solid. Stay flexible.

XSYS

Print solid. Stay flexible.