


XSYS

Print solid. Stay flexible.

nyloflex[®] **Combi F II**

Compact all in one system

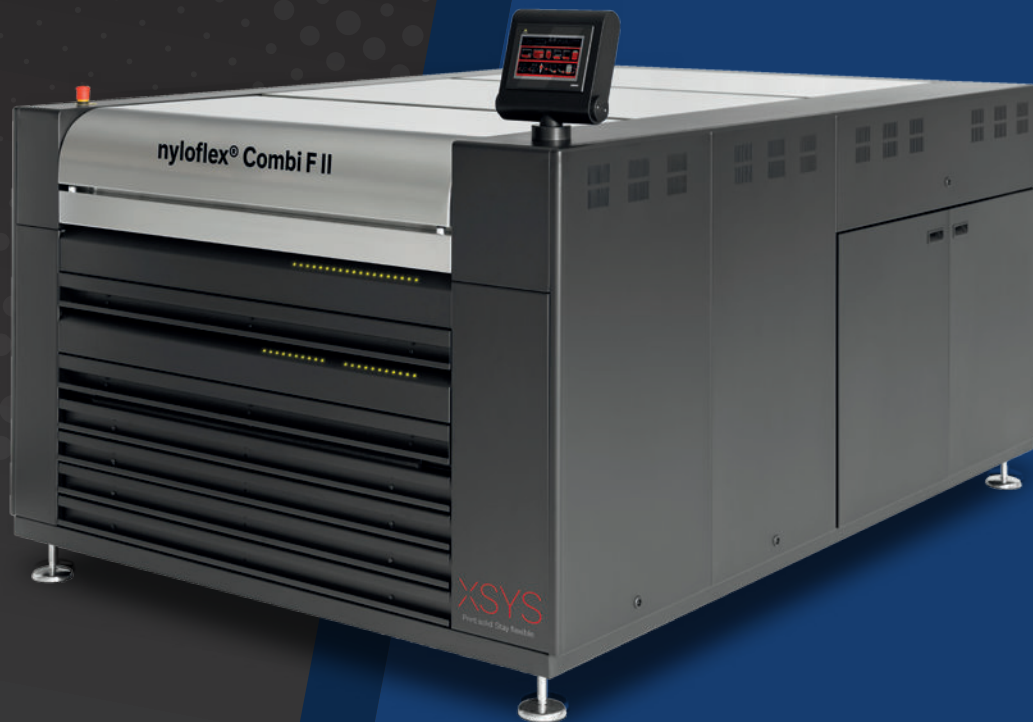

Be
brilliant.

HIGHLY EFFICIENT AND CONSISTENT QUALITY

- **New generation** compact all-in-one equipment.
- **Space saving and compact design** including exposure, washer, dryer and light finisher.
- **Exposure with 19 high** power lamps.
- **Short washout times due** to oscillating rotary brushes, dual tank system with pre-wash section to separate LAMS.
- **Four insulated drying drawers** with individual timers ensure temperature uniformity and reduce drying times.
- **Consistent quality due** to process automation.
 - 24 memory channels for processing parameters and PLC control.
 - Exposure section with airflow and cooled bed for optimal temperature control.
 - Integrated heating / chilling device for temperature control of washout solvent.
 - Solid content measurement with dosing pump for automatic solvent replenishment.
 - Optical detection of defective lamps.



USER-FRIENDLY OPERATION

- **Operator friendly colour** touch screen with graphic display of all functions.
- **Easy plate** input due to self-adhesive plate fixing-no punching, no loss of material.
- **Efficient exhaust** system reduces emissions.
- **The operating hours** of all main components can be displayed.
- **Digital timer** and count down facility.



nyloflex® Combi F II

For narrow web and mid web applications, suitable for processing high quality photopolymer plates up to a maximum size of 660 mm x 860 mm (26" x 33.9")

Be
brilliant.

Combi F II

Compact all in one system

Technical data



nyloflex® Combi F II

Maximum plate size (W x L)	860 mm x 660 mm (33.9" x 26.0")
Electrical connection	230 V, 50/60 Hz (3 Ph/N/PE) / 400 V, 50 / 60 Hz (3 Ph/N/PE)
Nominal current	28 A / 16 A
Nominal power	10 kW
Exhaust air flow rate	min. 440 Nm ³ / h (260 CFM)
Compressed air	Ø 6 mm, min. 6 bar, (87 PSI)
Tube type UV-A	60 W, high intensity tubes with reflector
Tube type UV-C	75 W, TUV
Dryer	4 drawers
Weight (approx.)	1000 kg (2204 lbs) net 1300 kg (2866 lbs) gross
Crate dimensions (W x D x H)	2780 mm x 1910 mm x 1630 mm (109.5" x 75.2" x 64.2")
Recommended ambient temp.	20 -25 °C (68 - 77 °F)

Washout solvent

For best and consistent washout results, we recommend nylosolv A washout solvent. If other washout solvents may be used, we advise to check it's suitability first with a XSYS technician or sales representative.

Equipment Dimensions

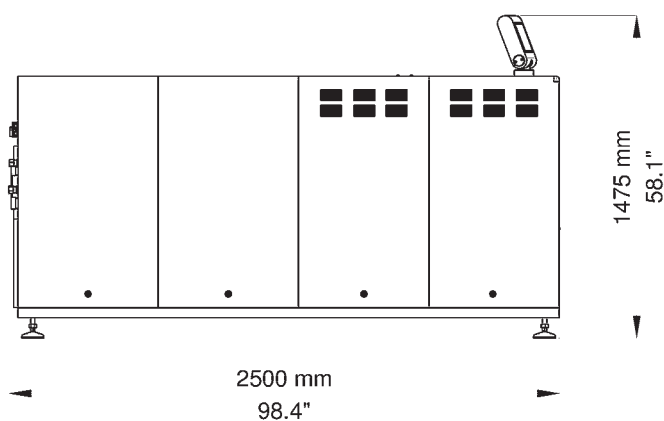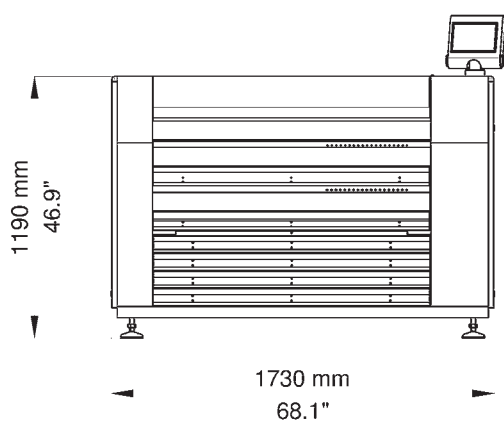

Please contact us for additional information.

info@xsyglobal.com • www.xsyglobal.com

Our technical documents are designed to inform and guide our customers. The information provided herein is accurate to the best of XSYS's knowledge; however, we accept no liability for any errors, inaccuracies, or opinions expressed. Customers are responsible for determining the suitability of this product for their specific application. XSYS assumes no responsibility for any loss incurred as a result of reliance on the information contained in this document. Product names followed by ® are registered trademarks of XSYS Germany GmbH and/or its affiliates.

XSYS 03-2025

Print solid. Stay flexible.

XSYS

Print solid. Stay flexible.