XSYS

Print solid. Stay flexible.

nyloflex®
Exposure FIV E

Premium exposure system for high qualtiy flexo plates

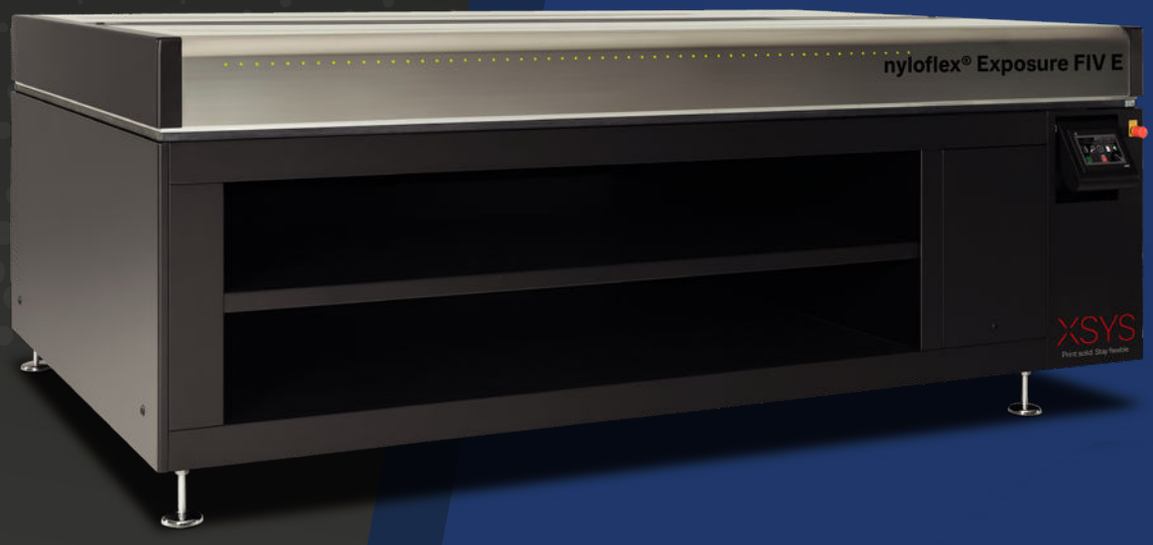

Be
brilliant.

HIGH QUALITY AND EFFICIENCY
DUE TO EFFECTIVE TEMPERATURE CONTROL

- **Exposure unit** clamshell type.
- **Consistent**, uniform exposure results due to tube pre-heat system.
- **Effective temperature** control system with integrated chiller and lamp air cooling system. Lamp temperature is automatically adjusted.

EASY AND COMFORTABLE HANDLING

- **Equipped with an automatic pneumatic** lid with integrated safety switches.
- **Flexibility as the control display** can be placed on the right or left side.

Be
brilliant.

nyloflex®
Exposure FIV E

Premium exposure system with high UV output for high quality and productivity.

nyloflex®

Exposure FIV E

Premium exposure system for high qualtiy flexo plates

Technical data	nyloflex® Exposure FIV E
Maximum plate size (W x L)	1200 mm x 1600 mm (47” x 63”)
Electrical connection	400 V, 50 / 60 Hz (3 Ph/N/PE) 230 V, 50 / 60 Hz (3 Ph/PE)
Nominal current	8 A / 14 A
Nominal power	4.5 kW
Compressed air	6 mm Ø, min 7 bar (0.24”, min 102 PSI)
Tube type UV-A	80 W, high intensity tubes with reflector
Weight (approx.)	920 kg (2028 lbs) net 1200 kg (2646 lbs) gross
Crate dimensions (W x D x H)	2930 mm x 1930 mm x 1590 mm (115.4” x 76.0” x 62.6”)
Recommended ambient temp.	20 - 25 °C (68 - 77 °F)

Equipment Dimensions

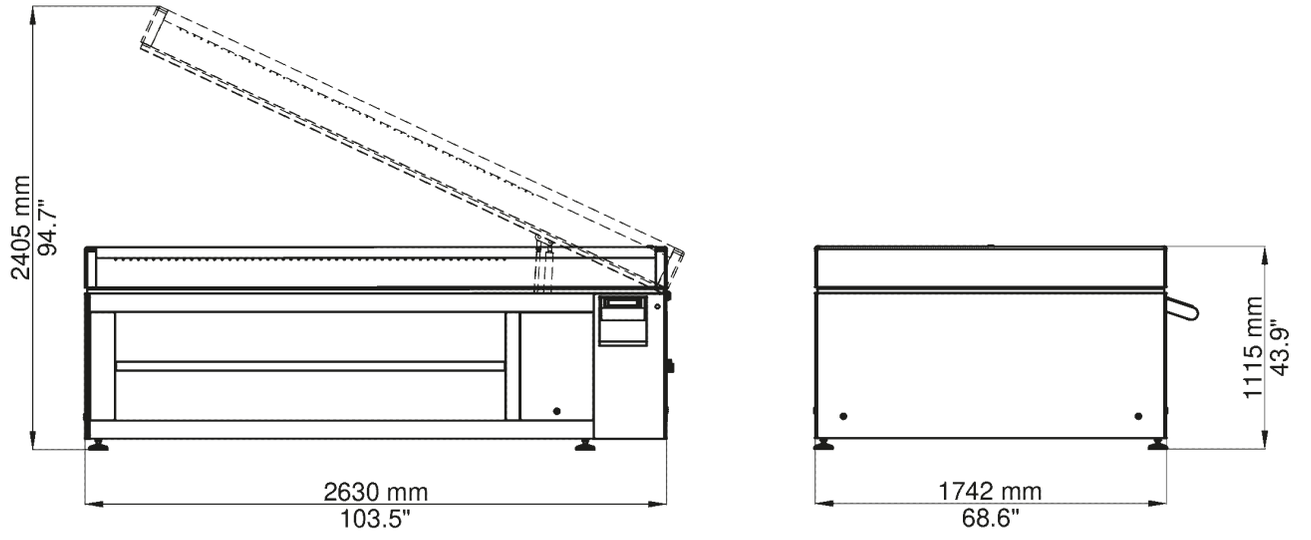

Please contact us for additional information.
info@xsysglobal.com • www.xsysglobal.com

Our technical documents are designed to inform and guide our customers. The information provided herein is accurate to the best of XSYS’s knowledge; however, we accept no liability for any errors, inaccuracies, or opinions expressed. Customers are responsible for determining the suitability of this product for their specific application. XSYS assumes no responsibility for any loss incurred as a result of reliance on the information contained in this document. Product names followed by ® are registered trademarks of XSYS Germany GmbH and/or its affiliates.

XSYS 03-2025

Print solid. Stay flexible.

XSYS

Print solid. Stay flexible.