


# XSYS

Print solid. Stay flexible.

## nyloflex® **Exposure FV E**

**Premium exposure system for  
high quality flexo plates**

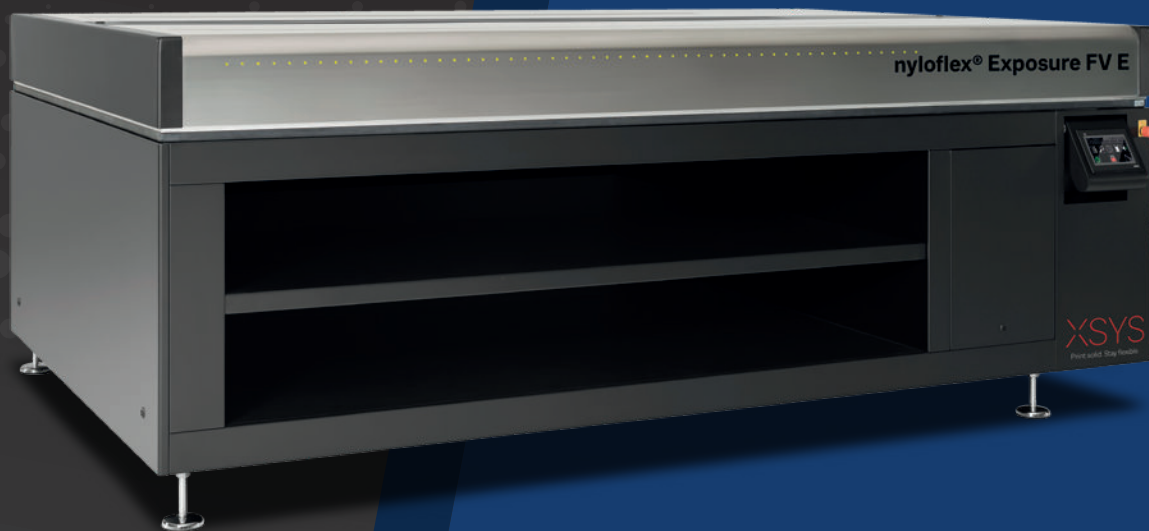

**Be**  
brilliant.

# HIGH QUALITY & CONSISTENCY DUE TO EFFECTIVE TEMPERATURE CONTROL

- **Exposure unit** clamshell type.
- **Consistent**, uniform exposure results due to tube pre-heat system.
- **Effective temperature** control system with integrated chiller and lamp air cooling system. Lamp temperature is automatically adjusted.



# EASY AND COMFORTABLE HANDLING

- **Equipped with an automatic** pneumatic lid with integrated safety switches.
- **Flexibility as the control display** can be placed on the right or left side.



## nyloflex® Exposure FV E

Wide web format, suitable for processing high quality digital and conventional photopolymer plates up to maximum 1320 x 2032 mm (52" x 80").



**Be**  
brilliant.

# nyloflex<sup>®</sup> Exposure FV E

Premium exposure system for high quality flexo plates

Technical data	nyloflex <sup>®</sup> Exposure FV E
Maximum plate size (W x L)	1320 mm x 2032 mm (52" x 80")
Electrical connection	400 V, 50 / 60 Hz (3 Ph/N/PE) 230 V, 50 / 60 Hz (3 Ph/PE)
Nominal current	11 A/19 A
Nominal power	7 kW
Compressed air	6 mm Ø, min 7 bar (0.24" min 102 PSI)
Tube type UV-A	100 W, high intensity tubes with reflector
Weight (approx.)	1020 kg (2249 lbs) net 1350 kg (2976 lbs) gross
Crate dimensions (W x D x H)	3480 mm x 2120 mm x 1490 mm (137.0" x 83.5" x 58.7")
Recommended ambient temp.	20 - 25 °C (68 - 77 °F)

## Equipment Dimensions

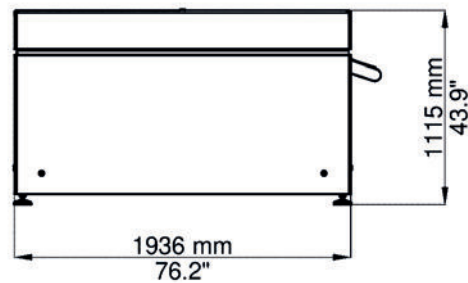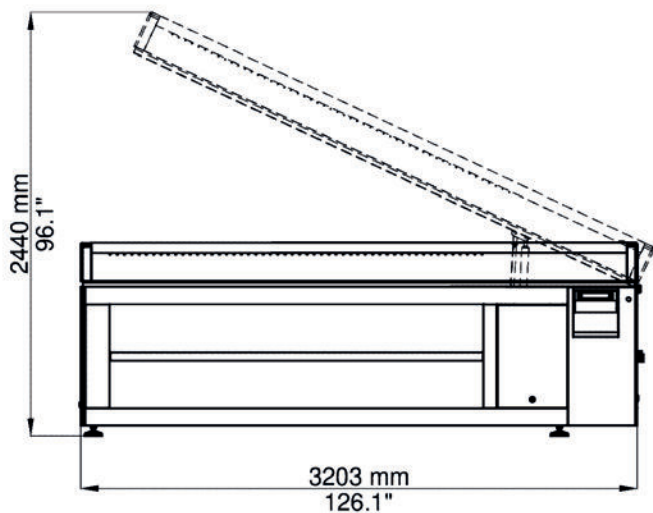

Please contact us for additional information.

info@xsyglobal.com • www.xsyglobal.com

Our technical documents are designed to inform and guide our customers. The information provided herein is accurate to the best of XSYS's knowledge; however, we accept no liability for any errors, inaccuracies, or opinions expressed. Customers are responsible for determining the suitability of this product for their specific application. XSYS assumes no responsibility for any loss incurred as a result of reliance on the information contained in this document. Product names followed by <sup>®</sup> are registered trademarks of XSYS Germany GmbH and/or its affiliates.

**XSYS** 03-2025  
Print solid. Stay flexible.

# XSYS

Print solid. Stay flexible.